


Exclusively from your Caterpillar® dealer

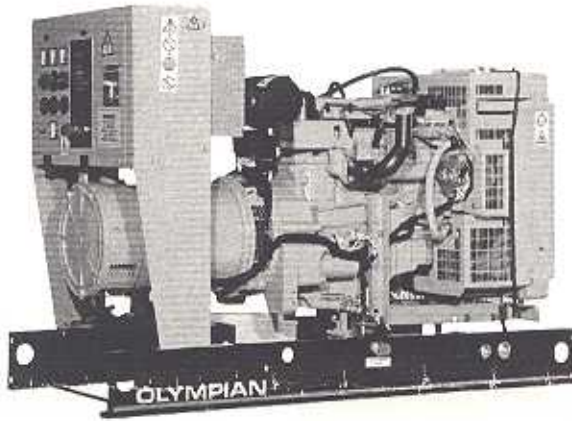

**STANDBY 10-15 kW**  
**PRIME 9-13.5 kW**  
**60 Hz**

Model	Standby — kW (kVA)		Prime — kW (kVA)	
	LP	Natural	LP	Natural
G10U3S	10 (10)	10 (10)	9 (9)	9 (9)
G12U3	12 (15)	12 (15)	11 (13.8)	11 (13.8)
G15U3	15 (18.8)	15 (18.8)	13.5 (16.9)	13.2 (16.5)
G15U3S	15 (15)	15 (15)	13.5 (13.5)	13 (13)

## FEATURES

### GENERATOR SET

- Complete system designed and built at ISO 9001 certified facilities
- Factory tested to design specifications at full load conditions

### ENGINE

- Governor, Woodward electronic
- Electrical system, 12 VDC
- Cartridge type filters
- Natural gas fuel system, LP gas options available
- Gas shutoff valve, solenoid operated
- Gas pressure regulator
- Low oil pressure shutdown

### GENERATOR

- Insulation system, class H
- Electrical design in accordance with BS5000 Part 99, IEC60034-1, VDE0530, NEMA MG-1.33

### AUTOMATIC VOLTAGE REGULATOR

- Voltage within  $\pm 0.5\%$  3 Phase and  $\pm 1.0\%$  Single Phase at steady state from no load to full load
- Provides fast recovery from transient load changes

### COOLING SYSTEM

- Radiator and cooling fan complete with protective guards
- Standard ambient temperatures up to 110° F (43° C)
- High coolant temperature shutdown
- Low coolant level shutdown
- Low coolant temperature alarm

### MOUNTING ARRANGEMENT

- Heavy-duty fabricated steel base with lifting points
- Anti-vibration pads to ensure vibration isolation
- Battery, rack, and cables
- Coolant and lube oil drains piped to edge of base
- Complete OSHA guarding

- Stub-up pipe ready for connection to silencer pipework
- Weather protective enclosures are available
- Fuel line terminated at base with NPT connections

### CIRCUIT BREAKER

- 3-pole with solid neutral, UL/CSA listed
- NEMA 1 steel enclosure, vibration isolated
- Electrical stub-up area directly below circuit breaker

### CONTROL SYSTEM

- 2001K Autostart control panel
- Vibration isolated NEMA 1 enclosure with hinged access door
- Engine and generator instrumentation
- Volts adjust potentiometer
- Safety shutdown and alarm indicators
- Audible alarm for all faults
- Volt-free contact for common alarm
- AC/DC wiring with multi-pin connectors for system flexibility

### EQUIPMENT FINISH

- All electroplated hardware
- Anticorrosive protection prior to painting
- High gloss polyurethane paint for durability and scuff resistance

### QUALITY STANDARDS

- BS4999, BS5000, BS5514, IEC60034, VDE 0530, NEMA MG1-33, ISO8528, NFPA 110 (with optional equipment)


### DOCUMENTATION

- Operation and maintenance manuals provided
- Wiring diagrams included

### WARRANTY

- 12 months from date of initial start-up or 18 months from shipping, whichever occurs first

Materials and specifications are subject to change without notice.



**STANDBY 10 - 15 kW**  
**PRIME 9 - 13.5 kW**  
**60 Hz**

**OLYMPIAN™**

*Exclusively from your Caterpillar® dealer*

**OPTIONAL EQUIPMENT\***

**ENCLOSURE**

- Weatherproof enclosure (includes internal silencer system)
- Sound attenuated enclosure (includes internal silencer system)

**SILENCER SYSTEM — OPEN UNIT**

- Level 1 silencer
- Level 2 silencer
- Level 3 silencer
- Mounting kit
- Through-wall installation kit

**ENGINE**

- Battery heater
- Lube oil sump heater, 110/120V

**SKIDBASE ACCESSORIES**

- Seismic vibration isolators (Zone 4)

**GENERATOR**

- Anti-condensation heater

**COOLING SYSTEM**

- Coolant heater, 110/120V
- Radiator transition flange

**CONTROL SYSTEM**

- Access 4000 control system
- Circuit breaker auxiliary contacts, volt free
- Static battery charger
- UL listed static battery chargers

**FUEL SYSTEM**

- LP gas (vapor)
- LP gas (liquid)

**MISCELLANEOUS ACCESSORIES**

- Toolkit
- Additional operator's manual pack
- CSA certification
- French Language labels

**EXTENDED WARRANTY**


- 24 months
  - 36 months
  - 48 months
  - 60 months
- (See warranty policy for details of coverage)

**TESTING**

- Special factory test available

\*Some options may not be available on all models. Not all options are listed.

**GENERATOR SET DIMENSIONS AND WEIGHTS**

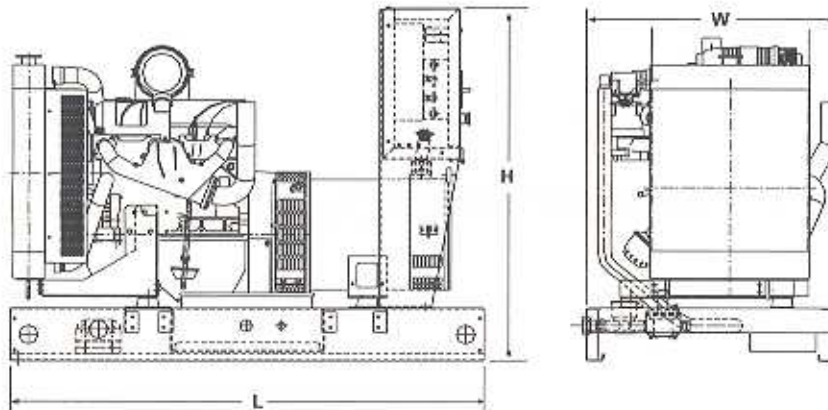

Model	Length in (mm)	Width in (mm)	Height in (mm)	Weight lbs (kg)**
G10U3S	53.1 (1348)	28 (710)	39.6 (1004)	858 (390)
G12U3	53.1 (1348)	28 (710)	39.6 (1004)	858 (390)
G15U3	53.1 (1348)	28 (710)	39.6 (1004)	891 (405)
G15U3S	53.1 (1348)	28 (710)	39.6 (1004)	891 (405)

**NOTE:** General configuration not to be used for installation. See specific dimensional drawings for detail.

\*\*Includes oil and coolant



STANDBY

15 kW

PRIME

13.5 - 13 kW

60 Hz

OLYMPIAN™

Exclusively from your Caterpillar® dealer

## G15U3S (1-Phase)

Materials and specifications are subject to change without notice.

Generator Set Technical Data — 1800 rpm/60 Hz		LP Gas		Natural Gas	
		Standby	Prime	Standby	Prime
Power Rating (at 240V)	kW (kVA)	15 (15)	13.5 (13.5)	15 (15)	13 (13)
<b>Lubricating System</b> Type: Full Pressure Oil Filter: Spin-On, Full Flow Oil Type Required: API CF-4 Total Oil Capacity Oil Pan	U.S. gal (L) U.S. gal (L)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)	1.2 (4.5) 1.1 (4.0)
<b>Fuel System</b> Generator Set Fuel Consumption 100% Load 75% Load 50% Load	Cfm (m <sup>3</sup> /hr) Cfm (m <sup>3</sup> /hr) Cfm (m <sup>3</sup> /hr)	84.6 (2.4) 64.5 (1.8) 44.5 (1.3)	76.6 (2.2) 58.5 (1.7) 40.5 (1.2)	234 (6.6) 178.5 (5.1) 123 (3.5)	204.4 (5.8) 156.3 (4.4) 108.3 (3.1)
<b>Engine Electrical System</b> Ignition System: Electronic, Distributorless Voltage/Ground: 12/Negative Battery Charging Generator Ampere Rating	Amps	45	45	45	45
<b>Cooling System</b> Water Pump Type: Centrifugal Radiator System Capacity Incl. Engine Maximum Coolant Static Head Coolant Flow Rate Minimum Temperature to Engine Temperature Rise Across Engine Heat Rejected to Coolant at Rated Power Total Heat Radiated to Room at Rated Power Radiator Fan Load	U.S. gal (L) Ft H <sub>2</sub> O (m H <sub>2</sub> O) U.S. gal/min (L/min) °F (°C) °F (°C) Btu/min (kW) Btu/min (kW) Hp (kW)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 855 (15) 488 (8.6) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 5.0 (2.8) 943 (16.6) 539 (9.5) 1.2 (0.9)	1.6 (6.1) 8.9 (2.7) 11.9 (45) 169 (76) 4.5 (2.5) 795 (14) 421 (7.4) 1.2 (0.9)
<b>Air Requirements</b> Combustion Air Flow Maximum Air Cleaner Restriction Radiator Cooling Air (zero restriction) Generator Cooling Air Allowable Air Flow Restriction (After radiator) Cooling Airflow (@ rated speed) Rate with restriction	Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min) Cfm (m <sup>3</sup> /min) In H <sub>2</sub> O (kPa) Cfm (m <sup>3</sup> /min)	57.2 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 1.0 (0.247) 2224 (63)	51.5 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 1.0 (0.247) 2224 (63)	57.2 (1.6) 5.9 (1.5) 2670 (75.6) 381 (10.8) 1.0 (0.247) 2224 (63)	51.5 (1.4) 5.9 (1.5) 2670 (75.6) 381 (10.8) 1.0 (0.247) 2224 (63)
<b>Exhaust System</b> Maximum Allowable Backpressure Exhaust Flow at Rated kW Exhaust Temperature at Rated kW — Dry Exhaust	In Hg (kPa) Cfm (m <sup>3</sup> /min) °F (°C)	5.1 (17.3) 170.5 (4.8) 1100 (593)	5.1 (17.3) 150.6 (4.3) 141.2 (410)	5.1 (17.3) 170.5 (4.8) 1133 (612)	5.1 (17.3) 148.6 (4.2) 1121 (605)
<b>Generator Set Noise Rating*</b> (Without Attenuation) at 3 ft (1 m)	dB(A)	84.7	84.2	84.7	84.2

Generator Technical Data	120/240V	110/220V		
<b>Motor Starting Capability:</b> (kVA) Self Excited	29	26		
<b>Full Load Efficiencies:</b> Standby Prime	87.0 87.3	85.5 86.1		
<b>Reactances (per unit):</b> $X_d$ $X'_d$ Reactances shown are applicable to the LPG standby rating $X_q$ $X'_q$	1.25 0.22 0.104 0.62 0.147	1.49 0.26 0.123 0.74 0.175		
<b>Time Constants:</b>	$t'_d$ 40 ms	$t'_d$ 6 ms	$t'_{do}$ 360 ms	$t_a$ 8 ms

\* dB(A) levels are for guidance only